Traffic Congestion in Benton and Washington Counties

Prepared for
Northwest Arkansas Council
Prepared By
Texas A&M Transportation Institute
College Station, Texas

Findings

The Texas A&M Transportation Institute (TTI) has been ranking traffic congestion levels on Texas urban roadways for the past four years. The Texas Legislature required the Texas Department of Transportation to identify the worst congestion points for the first time in 2009; the list has focused attention on improvements that provide the most benefits to the motoring public. In the summer of 2012, the Northwest Arkansas Council asked TTI to perform a similar analysis on eight key corridors in Benton and Washington counties. The analysis included about 40 miles of roadway in the two counties which represented less than 10 percent of the existing freeway and major street mileage in the two-county region, but at least 40 percent of the extra travel time (also called delay).

Exhibit 1 shows that US-412 in Washington County from AR-112 to Thompson Street is the most congested corridor in the study with about 137,000 hours of delay per mile and \$12.6 million congestion cost in 2011. This level of delay would make it the 55th most congested segment in the Texas Most Congested Corridors analysis. Three other sections would also be ranked in the Texas 100, all with more than \$10 million lost in annual time and fuel costs.

Exhibit 1. Results of Congestion Analysis

Exhibit 1. Results of congestion Analysis								
Rank	Roadway	County	From	То	Delay per	Travel Time	Planning Time	Annual Congestion
					Mile ¹	Index ³	Index⁴	Cost (\$mil) ²
1	US-412	Washington	AR-112	Thompson	136,900	1.41	8.35	12.6
2	US-71	Benton	Central	Moberly	130,200	1.10	2.80	11.2
	Business							
3	College	Washington	Lafayette	Main	107,100	1.23	4.14	10.9
4	Walnut	Benton	I-540	W Hudson	99,600	1.08	2.70	10.6
5	US-71	Benton	AR-340	N Walton	62,000	1.28	3.87	6.2
6	Thompson	Washington	Main	County	58,500	1.13	4.82	6.5
				Line				
7	I-540	Washington	US-62	AR-112	24,700	1.08	1.63	2.0
8	I-540	Washington/	Pleasant	Elm	17,900	1.07	1.70	2.4
		Benton	Grove	Springs				
	Non-study				17,050	1.08	2.02	40.8
	Roadways ⁵							
	Total or				32,200	1.10	2.35	103.2
	Average							

¹ Delay Per Mile—Extra travel time during the year due to congestion, divided by the corridor length. Primary measure used to rank roadway segments in this analysis.

² Cost of congestion – Value of time delay and excess fuel consumption based on an hourly rate of \$20.50 per hour of delay.

³ Travel Time Index – A ratio of travel time in the peak period to the travel time at free-flow conditions. A value of 1.30 indicates that a 20-minute free-flow trip takes 26 minutes in the peak period.

⁴ Planning Time Index – Represents the total travel time that should be planned for a trip. A PTI of 2.50 means that for a 30-minute trip in light traffic, 75 minutes should be planned to reach a destination on time.

⁵ These roadways include freeway, major arterial and minor arterial roadway segments in Benton and Washington counties that were not analyzed in the 8 study segments.

Uncertainty is part of the congestion problem; the planning time index illustrates the amount of extra time that one should allow for an important trip (for example, a commute trip where being late more than once a month might be a problem). A trip on College Avenue in Fayetteville, for example, could take more than four times the free-flow trip time – so a 10-minute late-evening trip could take 40 minutes on the worst travel day in a month. Thompson Street in Springdale, while less congested, is even more unreliable, with "worst day" travel times approaching five times the late evening trips.

The Northwest Arkansas congestion analysis was compared to the 2012 Texas Most Congested Corridor analysis to provide some perspective. Texas has four metropolitan areas of more than 1 million residents which contain 93 of the 100 worst Texas bottlenecks. For comparison purposes, El Paso and McAllen both have metro area populations of 800,000 and yet together only have 5 of the 100 most congested sections. Corpus Christi, with a similar population to Fayetteville-Springdale-Rogers, has no sections in the top 300. (see Exhibit 2)

Exhibit 2. Comparison of Northwest Arkansas with Smaller Regions in Texas 100 Analysis

Metro Region ¹	2010 Population (1000)	Segments in 2012 Texas Top 100	
Texas	25,670		
El Paso	804	3	
McAllen	780	2	
Corpus Christi	428	0	
Tyler	211	1	
Laredo	252	1	
Arkansas	2,940		
Benton County	230	2	
Washington County	210	2	

¹Note: 93 of the Texas 100 segments are in Houston, Dallas-Fort Worth, San Antonio and Austin metro regions.

Background

The traffic volume information in this report was based on the roadway inventory database maintained by the Arkansas State Highway and Transportation Department (AHTD). The speed data for the analysis was obtained from INRIX, a leading provider of traffic speed data, for the calendar year 2011.

Exhibit 3 shows the extent of the roadway system examined in this report. The congestion statistics were generated for each direction of each roadway segment; however, the results were reported by combining the directions.

Exhibit 3. Northwest Arkansas Roadway System Analyzed, 2011 Data

Area	Miles of Roadway				
Alea	Freeway	Major Street			
Region	82	469			
Roads Analyzed					
in Each County					
Benton	3	14			
Washington	8	15			

Source: Arkansas State Highway and Transportation Department

The INRIX speed network was matched to the AHTD roadway inventory network. Six of the eight road locations had both volume and speed data. Where speed data was not present, estimated speeds were

generated from similarly-sized metropolitan areas included in the Texas analysis. Roadway sections with similar traffic volumes were used to estimate travel speeds; less traveled locations received a higher estimated speed than locations with more traffic.

It is also important to note that short sections of roadway (for example, a very congested intersection) can produce very high congestion values. Longer road segments tend to lessen the effect of one very poorly performing short stretch of roadway. In the Texas analysis, a minimum length of three miles is used in the analysis so that the results focus on identifying potential corridor projects. All of the corridors in the northwest Arkansas analysis were at least four miles long.

Exhibit 4 shows the location of the analysis corridors in Benton and Washington Counties. US 71 Business (Corridor #2) and Walnut Street (Corridor #3) were the two corridors that contained estimated speeds.

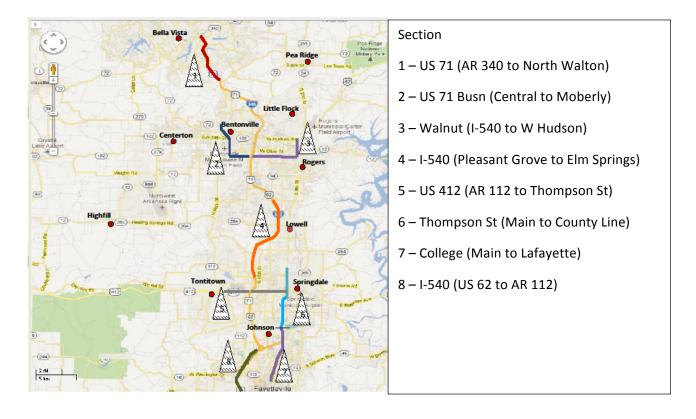


Exhibit 4. Location of Analysis Corridors

Source: Google Maps and TTI Analysis